

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/071834 A1

(51) International Patent Classification⁷: **H05B 3/74**
(21) International Application Number: **PCT/GB03/00577**
(22) International Filing Date: 12 February 2003 (12.02.2003)
(25) Filing Language: **English**
(26) Publication Language: **English**
(30) Priority Data:
0203826.3 19 February 2002 (19.02.2002) **GB**
(71) Applicant (for all designated States except US): **CERA-MASPEED LIMITED** [GB/GB]; Zortech Avenue, Oldington, Kidderminster, Worcestershire DY11 7DY (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(72) Inventor; and
(75) Inventor/Applicant (for US only): **McWILLIAMS, Kevin, Ronald** [GB/GB]; 12 Broad Walk, Stratford upon Avon, Warwickshire CV37 6HS (GB).
(74) Agent: **JACKSON, Derek, Charles**; Derek Jackson Associates, The Old Yard, Lower Town, Claines, Worcester, Worcestershire WR3 7RY (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ELECTRIC HEATER ASSEMBLY**

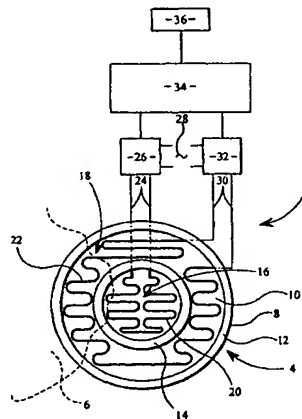

(57) Abstract: An electric heater assembly (2) for a smooth top cooking appliance comprises first and second heating zones (16 and 18) provided with first and second heating elements (20 and 22), respectively, the second heating zone (18) at least partially surrounding the first heating zone (16). First and second energy controllers (26 and 32) energise the first and second heating elements (20 and 22), respectively, from a power supply (28). The first heating zone (16) is operable alone with the first cyclic energy controller (26) controlling power of the first heating element (20) at selected settings between a maximum duty cycle and a minimum duty cycle. The first and second heating zones (16, 18) are operable together such that, in a selected full power operating condition of the assembly, the second cyclic energy controller (32) energises the second heating element (22) at substantially maximum duty cycle to provide a substantially maximum power in the second heating zone (18), and the first cyclic energy controller (26) energises the first heating element (20) at less than maximum duty cycle to provide less than maximum power in the first heating zone (16).

WO 03/071834 A1

- 1 -

ELECTRIC HEATER ASSEMBLY

This invention relates to electric heater assemblies for smooth top cooking appliances, particularly such
5 appliances having glass-ceramic cooking surfaces.

More particularly, the invention relates to such heater assemblies having heating elements arranged and connected such that separate heating zones are provided, namely a
10 first heating zone at least partially surrounded by at least one second heating zone. A wall of thermal insulation material is known to be provided to separate the heating zones.

15 The first heating zone usually comprises a main heating zone which can be operated alone. The at least one second heating zone comprises an auxiliary heating zone which is arranged to be operated together with the first heating zone. The heating zones may be operated by way
20 of a cyclic energy regulator.

In a known arrangement, the first heating zone is circular and is arranged concentrically with a surrounding second heating zone. In a further known
25 arrangement, a circular first heating zone is bordered by a substantially crescent-shaped second heating zone, to form an overall oval arrangement, or is bordered on either side with two wing-like second heating zones, to form what is commonly referred to as an 'angel'
30 arrangement.

There is known, for example from EP-A-0 892 584, an electric heater assembly in which, when the first, or main, heating zone is operated with the second, or
35 auxiliary, heating zone, in a full power setting the

- 2 -

specific surface power loading in the first zone is at least as great as the specific surface power loading in the second zone, while in a lower power setting the specific surface loading in the first zone is not greater
5 than the specific surface power loading in the second zone. That is the relative powers of the first and second zones are adapted according to the power level setting of the heater assembly.

10 When the first, or main, heating zone is operated alone, it is desirable that operation should be at optimum maximum power in order to provide maximum efficiency of operation, such as for boiling a liquid in a cooking vessel overlying the first heating zone. However, when
15 this heating zone is operated with the second, or auxiliary, heating zone, the first heating zone may provide excessively high power relative to the second heating zone, leading to unsatisfactory heat distribution in the heater assembly. In the case of a concentric
20 arrangement of the first and second heating zones, high power in the main central heating zone relative to the auxiliary outer heating zone provides what is known as a centre-weighted heat distribution, which can be undesirable.

25

In order to deal with this problem, it is known, for example from EP-A-0 551 172, to provide an arrangement in which a further heating element is located with the heating element or elements in the outer heating zone of
30 a heater assembly having a concentric arrangement of central and outer heating zones. When the central and outer zones are operated together, the heating element or elements in the central heating zone is or are arranged to be electrically connected in series with the further
35 heating element provided in the outer heating zone. This

- 3 -

reduces the power in the central heating zone to an acceptable level, but allows the optimum full power of the central heating zone to be obtained when the central heating zone is operated alone, without the heating
5 element or elements therein being connected in series with the further heating element. However, such an arrangement is complex and expensive to implement.

It is an object of the present invention to overcome or
10 minimise this problem.

According to the present invention there is provided an electric heater assembly for a smooth top cooking appliance, the assembly comprising a first heating zone
15 provided with at least one first heating element, and at least one second heating zone provided with at least one second heating element, the at least one second heating zone at least partially surrounding the first heating zone, and a cyclic energy regulator for energising the
20 heating elements from a power supply, wherein a first cyclic energy controller is provided adapted to energise the at least one first heating element and a second cyclic energy controller is provided adapted to energise the at least one second heating element, wherein the
25 assembly is adapted whereby the first heating zone is operable alone with the first cyclic energy controller controlling power of the at least one first heating element at selected settings between a maximum duty cycle and a minimum duty cycle, and wherein the assembly is
30 further adapted whereby the first and the at least one second heating zones are operable together and such that in a selected full power operating condition of the assembly the second cyclic energy controller energises the at least one second heating element at substantially
35 maximum duty cycle to provide a substantially maximum

- 4 -

power in the at least one second heating zone, and the first cyclic energy controller energises the at least one first heating element at less than maximum duty cycle to provide less than maximum power in the first heating zone.

The heater assembly may be still further adapted whereby the first and second heating zones are operable together such that, at selected operating power conditions of the heater assembly, lower than the full power operating condition, a predetermined ratio is arranged between the duty cycle provided by the first cyclic energy controller and the duty cycle provided by the second cyclic energy controller.

The predetermined ration may be fixed. In such a case, the predetermined ratio may be that obtaining at the full power operating condition of the heater assembly and may be maintained down to a low power operating condition of the heater assembly limited by a minimum duty cycle achievable by the first cyclic energy controller. When such low power operating condition of the heater assembly is reached, a lower power operating condition of the heater assembly may be obtained by maintaining, at its minimum value, the duty cycle set by the first cyclic energy controller and further reducing the duty cycle provided by the second cyclic energy controller whereby a further predetermined ratio is established between the duty cycles provided by the first and second cyclic energy controllers.

In an alternative arrangement, the predetermined ratio may be variable. In such a case, the ratio may be arranged to vary in predetermined manner whereby it is gradually changed from an initial value, obtaining at the

- 5 -

full power operating condition of the heater assembly, to a final value, obtaining at a lowest power operating condition of the heater assembly. The final value of the ratio may be substantially unity, achieved by operating
5 both the first and the second cyclic energy controllers to provide substantially minimum and matched duty cycles.

In the selected full power operating condition of the heater assembly, the second cyclic energy controller may
10 be arranged to energise the at least one second heating element at substantially 100 percent duty cycle, with the first cyclic energy controller arranged to energise the at least one first heating element at about 80 percent duty cycle.

15 The first and second cyclic energy controllers may comprise first and second cycling energy regulators or first and second cycling relays.

20 The first and second cyclic energy controllers may be operated by a microprocessor-based control system which may be associated with manual input selection means.

The first heating zone may comprise a main heating zone,
25 with the at least one second heating zone comprising at least one auxiliary heating zone.

The first heating zone may be circular and arranged concentrically with and surrounded by one or more second
30 heating zones.

Alternatively, the first heating zone may be circular and partially bordered by one or two second heating zones.

- 6 -

The first and second heating zones may be separated by a wall of thermal insulation material.

5 The smooth top cooking appliance may comprise a glass-ceramic cooking surface.

By means of the present invention, an electric heater assembly is provided in which a first, or main, heating zone is operable alone at optimum power, but is
10 automatically reduced in simple manner to a desired lower power when operated together with at least one associated second, or auxiliary, heating zone. Furthermore, a desired ratio between the heating powers of the first and second heating zones is readily obtained, at selected
15 settings of the heater assembly, over the operating range of the heater assembly.

For a better understanding of the present invention and to show more clearly how it may be carried into effect,
20 reference will now be made, by way of example, to the accompanying drawings in which:

Figure 1 is a schematic plan view of an embodiment of an electric heater assembly according to the present
25 invention; and

Figures 2 and 3 are plan views of alternative heater arrangements for use in the assembly of Figure 1.

30 In an electric heater assembly 2, a radiant electric heater 4 is provided for location beneath a glass-ceramic cooking surface 6 in a cooking appliance. The heater 4 has a metal dish 8 containing a layer 10 of thermal and electrical insulation material, such as microporous
35 thermal and electrical insulation material. A ring-

- 7 -

shaped wall 12 of thermal insulation material extends peripherally around the heater and a ring-shaped inner wall 14 is optionally provided concentrically with the peripheral wall 12.

5

Two concentric heating zones are provided in the heater, a first main heating zone 16 being surrounded by a second auxiliary heating zone 18. A first heating element 20 of well known form is arranged in the first heating zone 16 and a second heating element 22 of well known form is similarly arranged in the second heating zone 18.

10

Multiple first and second heating elements 20, 22 could be provided in the first and second heating zones 16, 18, if desired.

15

The first heating element 20 is electrically connected by leads 24 to a first cyclic energy controller 26, by means of which the first heating element 20 is energised from a power supply 28.

20

The second heating element 22 is electrically connected by leads 30 to a second cyclic energy controller 32, by means of which the second heating element 22 is energised from the power supply 28.

25

The first and second cyclic energy controllers 26, 32 comprise first and second cycling energy regulators or first and second cycling relays. They are arranged to be operated by a microprocessor-based control system 34

30

which is associated with a manual input selection means 36 by means of which desired power settings of the heater 4 can be entered and also selection of the heating elements for energising.

- 8 -

The heater assembly 2 is arranged whereby the first heating element 20 can be energised alone, to operate only the first heating zone 16, or can be energised together with the second heating element 22, to operate
5 both the first and the second heating zones 16 and 18. When the first heating zone 16 is operated alone, the first cyclic energy controller 26 operates to control the power of the first heating element 20, at selected settings of the input selection means 36, between a
10 maximum duty cycle and a minimum duty cycle. Full power of the first heating element 20 is arranged at maximum duty cycle of the first cyclic energy controller 26 and is arranged to provide optimum heating performance of the first heating zone 16 when a cooking vessel (not shown)
15 is located on the cooking surface 6 overlying the first heating zone 16.

When the first and second heating zones 16, 18 are operated together, it is arranged that in a selected full
20 power operating condition of the assembly 2 the second cyclic energy controller 32 energises the second heating element 22 at substantially maximum duty cycle, namely 100 percent duty cycle, to provide a substantially maximum power in the second heating zone 18. At the same
25 time, in this operating condition of the assembly 2, the first cyclic energy controller 26 is arranged to energise the first heating element 20 at less than maximum duty cycle to provide less than maximum power in the first heating zone 16. Such less than maximum duty cycle may
30 be suitably about 80 percent duty cycle. In the absence of such reduction in power in the first heating zone 16, the maximum power available in the first heating zone 16 would result in the first heating zone 16 being much hotter than the second heating zone 18, resulting in the
35 heater 4 having a heat distribution undesirably weighted

- 9 -

towards the centre. By means of the reduction in power in the first heating zone 16, a better heat distribution is achieved.

5 A further feature of the heater assembly 2 is available when the first and second heating zones 16, 18 are operated together. It is provided that as operating power conditions of the heater assembly 2 lower than the full power operating condition are selected, a
10 predetermined fixed or varying ratio is arranged between the duty cycle provided by the first cyclic energy controller 26 and the duty cycle provided by the second cyclic energy controller 32. The predetermined ratio can be that obtaining at the full power operating condition
15 of the heater assembly 2 and can be substantially fixed and maintained down to a low power operating condition of the heater assembly 2 limited by a minimum duty cycle achievable by the first cyclic energy controller 26. When such low power operating condition of the heater
20 assembly 2 is reached, a lower power operating condition of the heater assembly 2 can be obtained by maintaining, at its minimum value, the duty cycle set by the first cyclic energy controller 26 and further reducing the duty cycle provided by the second cyclic energy controller 32,
25 whereby a further predetermined ratio is established between the duty cycles provided by the first and second cyclic energy controllers 26, 32. This enables a lower overall minimum power to be obtained from the heater assembly 2, although the heat distribution would become
30 more weighted towards the centre of the heater. Since the power is low, this is unlikely to adversely affect cooking performance on the heater 4.

In an alternative arrangement, the ratio between the duty
35 cycles provided by the first and second cyclic energy

- 10 -

controllers 26 and 32 can be arranged to vary in predetermined manner whereby the ratio is gradually changed from an initial value, obtaining at the selected full power operating condition of the heater assembly 2, to a final value obtaining at the selected lowest power operating condition of the heater assembly 2. The final value of the ratio can be arranged to be substantially unity, achieved by operating both the first and the second cyclic energy controllers 26 and 32 to provide substantially minimum and matched (i.e. the same) duty cycles.

The heater assembly 2 of the present invention is not limited to the heater 4 having a concentric arrangement of first 16 and second 18 heating zones. As shown in Figure 2, an alternative heater 4A for use in the assembly 2 of Figure 1 comprises an oval metal dish 8 with a layer 10 of thermal insulation material. A first main heating zone 16, having a first heating element 20, is bordered by a crescent-shaped second auxiliary heating zone 18, having a second heating element 22. A peripheral wall 12 of thermal insulation material is provided and a further wall portion 14 of thermal insulation material divides the two heating zones 16, 18. The first heating element 20 has leads 24 for connection to the first cyclic energy controller 26 of Figure 1 and the second heating element 22 has leads 30 for connection to the second cyclic energy controller 32 of Figure 1. Operation of the resulting heater assembly is substantially the same as that previously described with reference to Figure 1.

As shown in Figure 3, a further alternative heater 4B for use in the assembly 2 of Figure 1 is similar to that shown in Figure 2 with the exception that two second

- 11 -

auxiliary heating zones 18 are provided bordering a first main heating zone 16. Heating elements 22 in the second heating zones 18 are connected in series or in parallel and have leads 30 for connection to the second cyclic
5 energy controller 32 of Figure 1. Heating element 20, in the first heating zone 16, has leads 24 for connection to the first cyclic energy controller 26 of Figure 1.

CLAIMS

1. An electric heater assembly for a smooth top cooking
appliance, the assembly comprising a first heating zone
5 (16) provided with at least one first heating element
(20), and at least one second heating zone (18) provided
with at least one second heating element (22), the at
least one second heating zone at least partially
surrounding the first heating zone, and a cyclic energy
10 regulator (26, 32) for energising the heating elements
from a power supply (28), characterised in that a first
cyclic energy controller (26) is provided adapted to
energise the at least one first heating element (20) and
in that a second cyclic energy controller (32) is
15 provided adapted to energise the at least one second
heating element (22), wherein the assembly is adapted
whereby the first heating zone (16) is operable alone
with the first cyclic energy controller (26) controlling
power of the at least one first heating element (16) at
20 selected settings between a maximum duty cycle and a
minimum duty cycle, and wherein the assembly is further
adapted whereby the first and the at least one second
heating zones (16, 18) are operable together and such
that in a selected full power operating condition of the
25 assembly the second cyclic energy controller energises
the at least one second heating element at substantially
maximum duty cycle to provide a substantially maximum
power in the at least one second heating zone, and the
first cyclic energy controller energises the at least one
30 first heating element at less than maximum duty cycle to
provide less than maximum power in the first heating
zone.

2. An assembly as claimed in claim 1, characterised in
35 that the heater assembly is further adapted whereby the

- 13 -

first and second heating zones (16, 18) are operable together such that, at selected operating power conditions of the heater assembly, lower than the full power operating condition, a predetermined fixed or
5 varying ratio is arranged between the duty cycle provided by the first cyclic energy controller and the duty cycle provided by the second cyclic energy controller.

3. An assembly as claimed in claim 2, characterised in
10 that the ratio is fixed.

4. An assembly as claimed in claim 3, characterised in that the predetermined ratio is that obtaining at the full power operating condition of the heater assembly.
15

5. An assembly as claimed in claim 3 or 4, characterised in that the predetermined ratio is maintained down to a low power operating condition of the heater assembly limited by a minimum duty cycle
20 achievable by the first cyclic energy controller (26).

6. An assembly as claimed in claim 5, characterised in that, when such low power operating condition of the heater assembly is reached, a lower power operating
25 condition of the heater assembly is obtained by maintaining, at its minimum value, the duty cycle set by the first cyclic energy controller (26) and further reducing the duty cycle provided by the second cyclic energy controller (32) whereby a further predetermined
30 ratio is established between the duty cycles provided by the first and second cyclic energy controllers.

7. An assembly as claimed in claim 3, characterised in that the ratio is variable.
35

- 14 -

8. An assembly as claimed in claim 7, characterised in that the ratio is arranged to vary in predetermined manner whereby it is gradually changed from an initial value, obtaining at the full power operating condition of the heater assembly, to a final value, obtaining at a lowest power operating condition of the heater assembly.

9. An assembly as claimed in claim 8, characterised in that the final value of the ratio is substantially unity, achieved by operating both the first and second cyclic energy controllers (26, 32) to provide substantially minimum and matched duty cycles.

10. An assembly as claimed in any preceding claim, characterised in that, in the selected full power operating condition of the heater assembly, the second cyclic energy controller (32) is arranged to energise the at least one second heating element (22) at substantially 100 percent duty cycle, with the first cyclic energy controller (26) arranged to energise the at least one first heating element (20) at about 80 percent duty cycle.

11. An assembly as claimed in any preceding claim, characterised in that the first and second cyclic energy controllers (26, 32) comprise first and second cycling energy regulators or first and second cycling relays.

12. An assembly as claimed in any preceding claim, characterised in that the first and second cyclic energy controllers (26, 32) are operated by a microprocessor-based control system (34).

- 15 -

13. An assembly as claimed in claim 12, characterised in that the microprocessor-based control system (34) is associated with manual input selection means (36).

5 14. An assembly as claimed in any preceding claim, characterised in that the first heating zone (16) comprises a main heating zone, with the at least one second heating zone (18) comprising at least one auxiliary heating zone.

10

15. An assembly as claimed in claim 14, characterised in that the first heating zone (16) is circular and arranged concentrically with and surrounded by one or more second heating zones (18).


15



16. An assembly as claimed in claim 14, characterised in that the first heating zone (16) is circular and partially bordered by one or two second heating zones (18).

20

17. An assembly as claimed in any preceding claim, characterised in that the first and second heating zones (16, 18) are separated by a wall (14) of thermal insulation material.

FIG 1

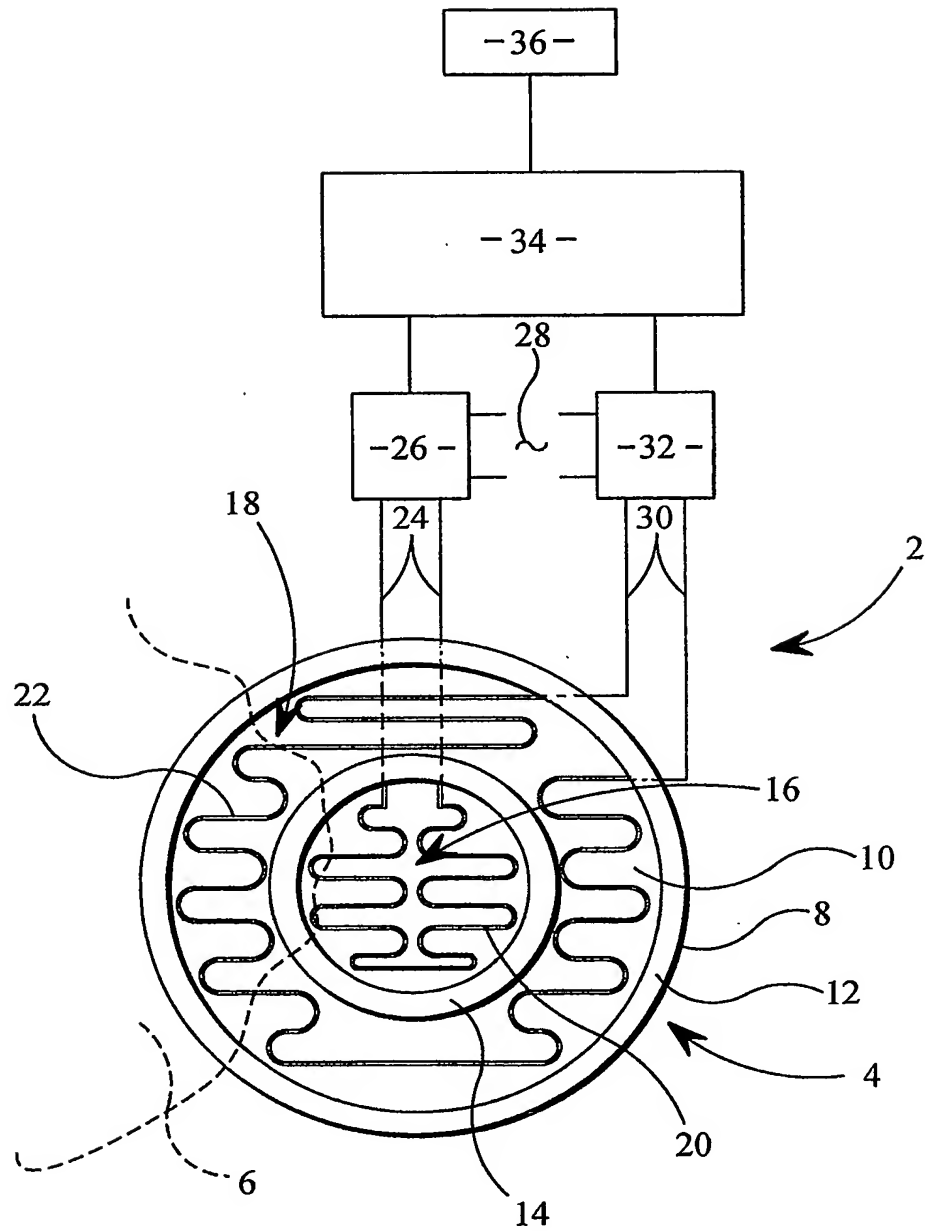

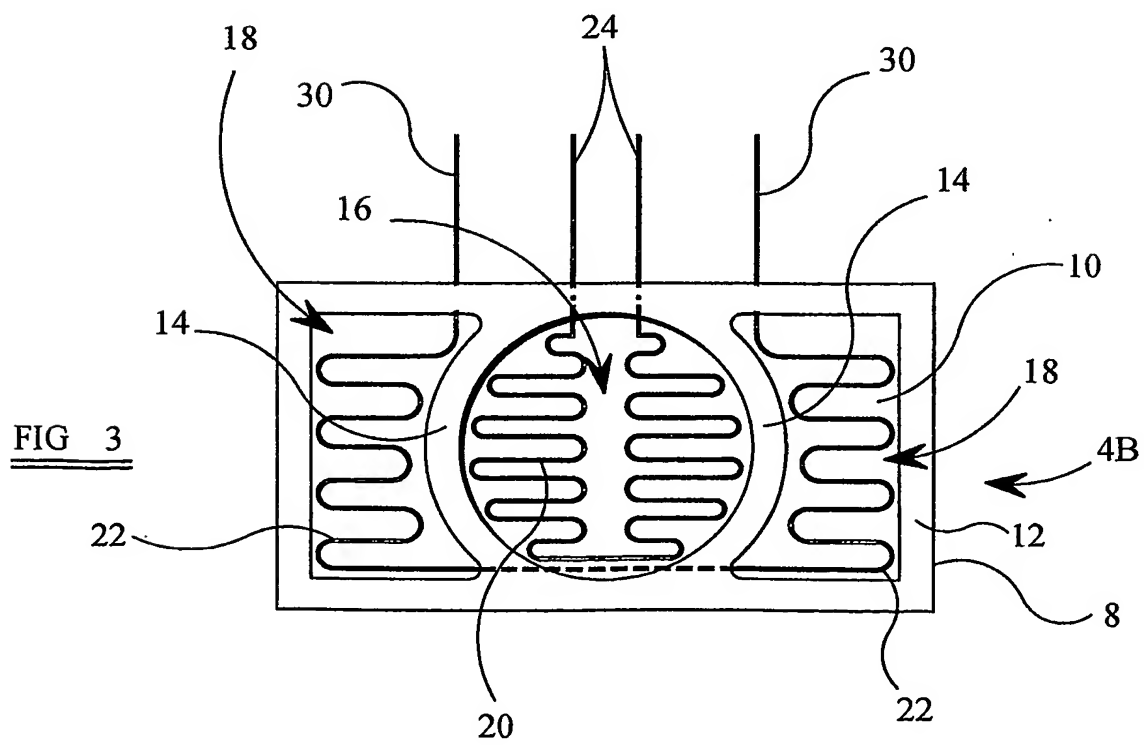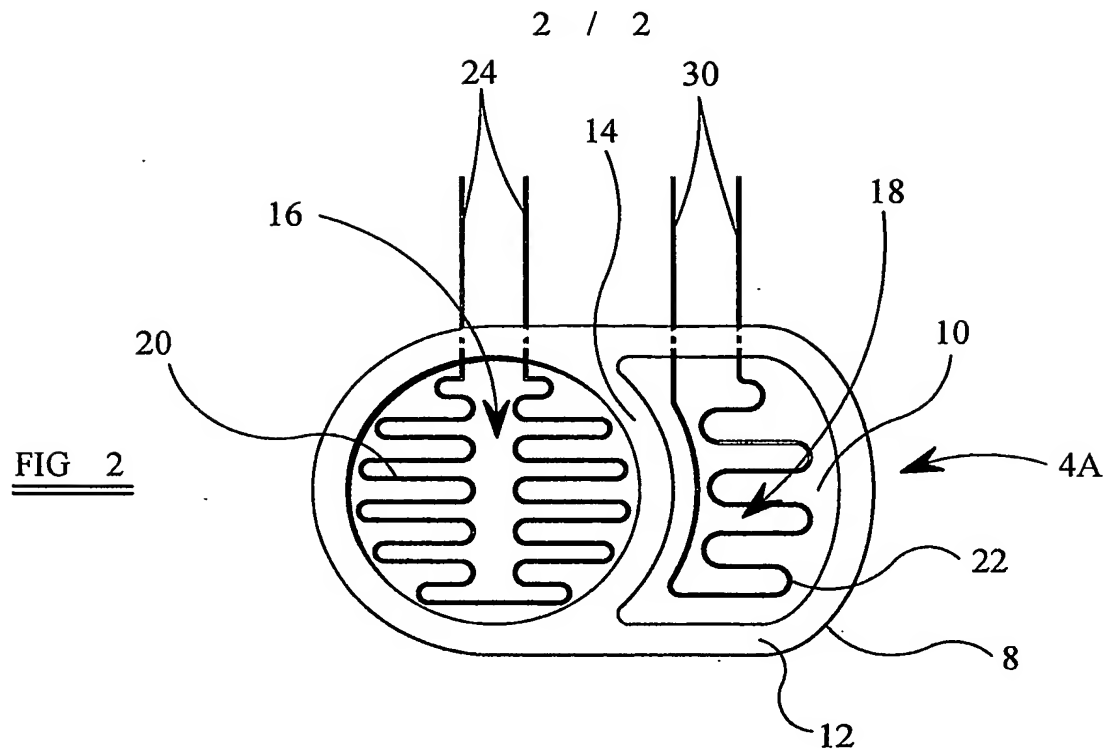

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/GB 03/00577

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H05B3/74

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 511 789 A (WILDE EUGEN ET AL) 16 April 1985 (1985-04-16) column 1, line 59 - column 2, line 16 column 3, line 29 - line 68	1-17
Y	EP 0 892 584 A (CERAMASPEED LTD) 20 January 1999 (1999-01-20) column 1, line 3,4 column 4, line 27 - line 31 column 2, line 32 - line 40 column 2, line 58 - column 3, line 5 column 5, line 44 - line 54 column 3, line 5 - line 11 column 6, line 31 - line 41 column 5, line 55; figure 1	1-17

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

18 July 2003

Date of mailing of the international search report

24/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Taccoen, J-F

INTERNATIONAL SEARCH REPORT

Intern: Application No

PCT, GB 03/00577

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4511789	A	16-04-1985	DE 3234349 A1	22-03-1984
			DE 3314501 A1	25-10-1984
			AT 38757 T	15-12-1988
			AU 1912683 A	22-03-1984
			DE 3378516 D1	22-12-1988
			EP 0103741 A2	28-03-1984
			ES 8406833 A1	01-11-1984
			GR 81429 A1	11-12-1984
			JP 59066095 A	14-04-1984
			YU 187483 A1	31-12-1985
			ZA 8306251 A	24-04-1985
EP 0892584	A	20-01-1999	GB 2327541 A	27-01-1999
			EP 0892584 A2	20-01-1999